



Shown: 60"Ø model in Deep bronze anodized finish and Opal white glass.

## MODEL NUMBER 4220

### DESCRIPTION

Anodized aluminum frame with cut glass and polished aluminum reflectors. Cable Suspension.

### FINISH

Deep bronze anodized or Silver anodized.

### KILN FORMED GLASS

Clear or Opal white.

### DIMENSIONS

30"Ø x 2"H  
36"Ø x 2"H  
42"Ø x 2"H  
48"Ø x 2"H  
54"Ø x 2"H  
60"Ø x 2"H  
72"Ø x 2"H

### MIN OAL

12" Min. OAL  
18" Min. OAL  
24" Min. OAL  
30" Min. OAL  
36" Min. OAL  
42" Min. OAL  
48" Min. OAL

### NET WT

12 lbs.  
14 lbs.  
16 lbs.  
18 lbs.  
20 lbs.  
28 lbs.  
35 lbs.

### CEILING PLATE

4.5"Ø x .25"D

### VOLTAGE / LAMP TYPE

Integrated LED, 24V, 2,700°K, 98 CRI Ra / 93 CRI R9  
94 TM30 Rf / 101 TM30 Rg. 30,000 hr.

120V to 24V dimmable driver included.

Must be located in remote cubby / crawl space.


4220.30 25W, 2,700°K, 98 CRI, 2,152 lumens.  
4220.36 37W, 2,700°K, 98 CRI, 3,257 lumens.  
4220.42 50W, 2,700°K, 98 CRI, 4,363 lumens.  
4220.48 63W, 2,700°K, 98 CRI, 5,468 lumens.  
4220.54 75W, 2,700°K, 98 CRI, 6,573 lumens.  
4220.60 87W, 2,700°K, 98 CRI, 7,620 lumens.  
4220.72 100W, 2,700°K, 98 CRI, 8,725 lumens.

CA Title 24-JA8-2016


### PLEASE SPECIFY

Size, finish, glass color & OAL (net price includes cable for an OAL of up to 48"). Refer to price book for additional cable length. OAL can be adjusted in the field at installation.

SIDE VIEW

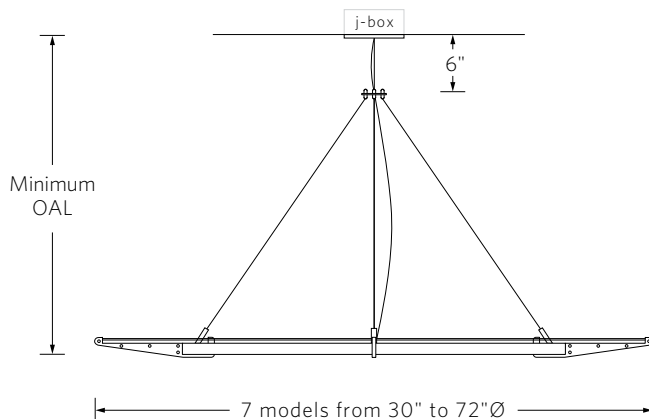

TOP VIEW

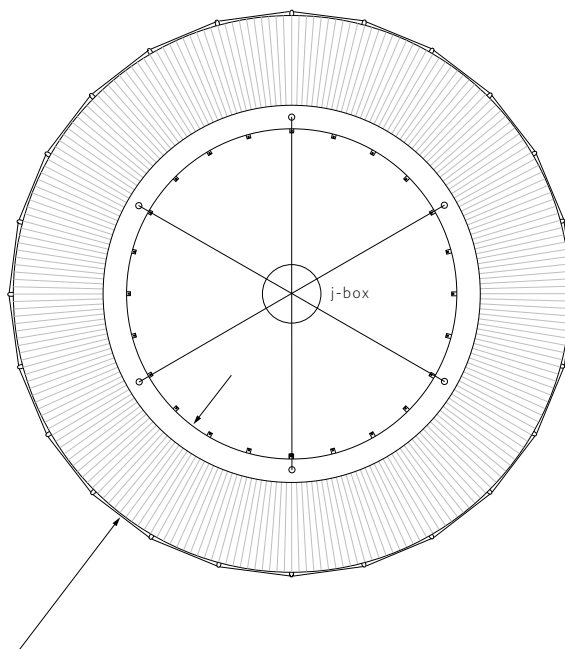

Outside Ring width is 9.5" on all models except 4220.72, which has a 12" width.